



LSC0507DEM

ELECTRIC SCISSOR LIFT

Comply with CE standard



Security and Intelligence

- Intelligent control system, real-time monitoring of equipment status;
- Multiple security protection to ensure personnel safety;
- Intelligent charging system to extend battery service life.

Easy to Control

- Drivable at full height to improve working efficiency;
- The proportion drops and the descent moves smoothly;
- Forklift pocket, easy to load, unload and transport.

Maintenance Friendly

- Self-lubricating sleeve;
- Swing-out tray on both sides, easy maintenance;
- Fault code indication to facilitate troubleshooting.

Standard Features

- Standard longitudinal forklift sprocket hole
- Side anti-collision function
- Adjustable extension platform
- Active pothole protection
- All motion alarm
- Emergency lowering system
- Drop anti-clip function
- Charging protection system
- Emergency stop button
- Proportional control
- Acousto-optic warning lights
- Drivable at full height
- Folding guardrails
- Over tilt protective system



Sales hotline : (+86) 511 - 80960018
National service hotline : 4008-899-856
www.liugong.com




We reserve the right to change the plan and parameters without informing the users as Liugong products are constantly updated and improved.
The product configuration and appearance in the photo are different from the actual model which should be subject to the actual product.
Liugong series logo in this brochure is a registered trademark of Guangxi Liugong Group Company, which has been legally authorized to use by us. Others are not allowed to use it without authorization.

LSC0507DEM >>>



Specifications

| Item | Unit | LSC0507DEM |
|--|------|------------|
| Size | | |
| A - Max.Work Height | m | 6.5 |
| B - Max.Platform Height | m | 4.5 |
| C - Min.Platform Height | m | 0.939 |
| D - Platform Length | m | 1.3 |
| E - Platform Width | m | 0.72 |
| F - Max.Platform Extension Length | m | 0.6 |
| G - Overall Length | m | 1.47 |
| H - Overall Length(Without Ladder) | m | 1.32 |
| I - Overall Width | m | 0.76 |
| J - Overall Height (Rails Up) | m | 2 |
| K - Overall Height (Rails Down) | m | 1.63 |
| L - Wheelbase | m | 1.07 |
| M - Ground Clearance (Stowed) | mm | 60 |
| N - Ground Clearance (Raised) | mm | 16 |
| Performance | | |
| Rated Load on Working Platform | kg | 240 |
| Safe Working Load on Extended Platform | kg | 110 |
| Max. Occupants | / | 2 |
| Travel Speed (Stowed) | km/h | 4 |
| Travel Speed (Raised) | km/h | 0.7 |
| Turning Radius (Inside) | m | 0 |
| Turning Radius (Outside) | m | 1.5 |
| Up/Down Time | s | 23/21 |
| Max.Gradeability | / | 25% |
| Max. Working Slope (Lateral/Vertical) | ° | X1.5°/Y3° |
| Tire size | mm | 230x80 |
| Power | | |
| Drive Motor | kW | 0.4 |
| Battery | / | 95Ah |
| Charger | / | 24V15A |
| Weight | | |
| Total Weight | kg | 895 |

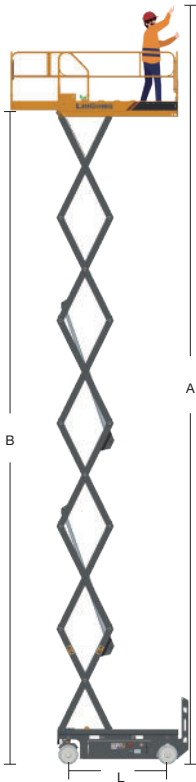

Swing-out Tray



Emergency Lowering System



Acousto-optic Warning Lights



Steering System



Extended Platform



Safety Overhaul Bracket



Folding Guardrails



Max.Gradeability 30%