

LSC0607DE

ELECTRIC SCISSOR LIFT

Comply with CE standard



Security and Intelligence

- Intelligent control system, real-time monitoring of equipment status;
- High quality sensors for weight and tilt to ensure personnel safety;
- Intelligent/Flexible charging system to extend battery service life.

Easy to Control

- Drivable at full height to improve working efficiency;
- The proportionate ascent and descent functionality smoothly;
- Forklift pocket, easy to load, unload and transport. Side pocket on larger machines;

Maintenance Friendly

- Self-lubricating pins;
- Swing-out tray on both sides for easy maintenance;
- Clear indication to facilitate troubleshooting.

Standard Features

- Standard longitudinal forklift sprocket hole
- Side anti-collision function
- Extension platform
- Active pothole protection
- All motion alarm
- Emergency lowering system
- Safety descend stop as per EN280
- Charging protection system
- Emergency stop button
- Proportionate control
- Acoustic-optical warning
- Drivable at full height
- Folding guardrails
- Tilt and weight protective system






LiuGong Machinery Europe B.V.
P.J. Oudweg 4
1314 CH Almere
The Netherlands
Mail: info@liugong-europe.com
www.liugong-europe.com

We reserve the right to change the plan and parameters without informing the users as Liugong products are constantly updated and improved.

The product configuration and appearance in the photo are different from the actual model which should be subject to the actual product.

Liugong series logo in this brochure is a registered trademark of Guangxi Liugong Group Company, which has been legally authorized to use by us. Others are not allowed to use it without authorization.

LSC0607DE >>>

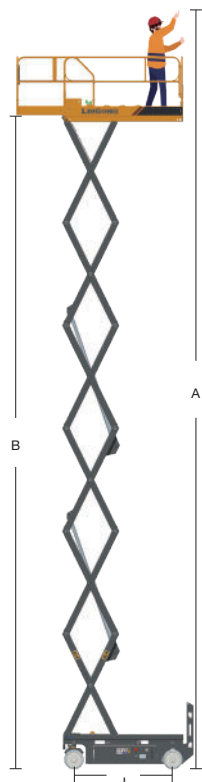

Specifications

Item	Unit	LSC0607DE
Size		
A - Max.Work Height	m	7.8
B - Max.Platform Height	m	5.8
C - Min.Platform Height	m	0.95
D - Platform Length	m	1.64
E - Platform Width	m	0.75
F - Max.Platform Extension Length	m	0.9
G - Overall Length	m	1.85
H - Overall Length (Without Ladder)	m	1.66
I - Overall Width	m	0.78
J - Overall Height (Rails Up)	m	2.15
K - Overall Height (Rails Down)	m	1.72
L - Wheelbase	m	1.32
M - Ground Clearance (Stowed)	mm	60
N - Ground Clearance (Raised)	mm	20
Performance		
Rated Load on Working Platform	kg	230
Safe Working Load on Extended Platform	kg	100
Platform Occupants Max. (in / out)	/	2 / 0
Travel Speed (Stowed)	km/h	4
Travel Speed (Raised)	km/h	0.7
Turning Radius (Inside)	m	0
Turning Radius (Outside)	m	1.6
Up/Down Time	s	25 / 20
Max.Gradeability	/	30%
Max. Working Slope (Lateral / Vertical)	°	X1.5° / Y3°
Tire size	mm	356 x 114
Power		
Drive Motor	kW	0.6
Battery	/	200 Ah
Charger	/	24 V 30 A
Weight		
Total Weight	kg	1,540



Swing-out Tray



Emergency Lowering System



Acousto-optic Warning Lights



Steering System



Extended Platform



Safety Overhaul Bracket



Folding Guardrails



Max.Gradeability 30%